

Cycoloy* Resin C6840

Americas: COMMERCIAL

Cycoloy* C6840 resin is an injection moldable, flame retardant PC/ABS blend. It contains non-chlorinated & non-brominated flame retardant systems intended to meet governmental regulations and various voluntary environmental labels. Key features of Cycoloy C6840 resin including very good flow, balanced impact property, heat resistance, hydrolytic stability and all color options make this grade an ideal candidate for thin wall applications.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	560	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	400	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	3.6	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	51	%	ASTM D 638
Tensile Modulus, 5 mm/min	26300	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	930	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	25400	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 50 mm/min	56	MPa	ISO 527
Tensile Stress, break, 50 mm/min	44	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	60	%	ISO 527
Tensile Modulus, 1 mm/min	2500	MPa	ISO 527
Flexural Stress, break, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2600	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	50	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	11	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	407	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*3 +23°C	15	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	10	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	15	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	10	kJ/m ²	ISO 179/1eA

¹ Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

² Only typical data for material selection purpose. Not to be used for part or tool design.
³ This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
⁴ Own measurement according to UL.
⁵ Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 www.kedisujiao.com

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

Cyclocoly* Resin C6840
Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
THERMAL			
Vicat Softening Temp, Rate B/50	93	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	89	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	85	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	85	°C	ASTM D 648
CTE, -40°C to 40°C, flow	6.E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	6.E-05	1/°C	ASTM E 831
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, -40°C to 40°C, flow	7.5E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.5E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	93	°C	ISO 306
Vicat Softening Temp, Rate B/120	96	°C	ISO 306
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	78	°C	ISO 75/Ae
Relative Temp Index, Elec	60	°C	UL 746B
Relative Temp Index, Mech w/impact	60	°C	UL 746B
Relative Temp Index, Mech w/o impact	60	°C	UL 746B
PHYSICAL			
Specific Gravity	1.18	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.6	%	SABIC Method
Melt Flow Rate, 260°C/2.16 kgf	26	g/10 min	ASTM D 1238
Density	1.19	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.2	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.1	%	ISO 62
Melt Volume Rate, MVR at 260°C/2.16 kg	23	cm ³ /10 min	ISO 1133

¹ Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

² Only typical data for material selection purpose. Not to be used for part or tool design.
³ This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
⁴ Own measurement according to UL.
⁵ Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 www.kedisujiao.com

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

Cycoloy* Resin C6840
Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2	mm	UL 94

¹ Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

² Only typical data for material selection purpose. Not to be used for part or tool design.
³ This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
⁴ Own measurement according to UL.
⁵ Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 www.kedisujiao.com

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

Cycoloy* Resin C6840
Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
Injection Molding		
Drying Temperature	75 - 80	°C
Drying Time	2 - 4	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.04	%
Melt Temperature	230 - 265	°C
Nozzle Temperature	230 - 265	°C
Front - Zone 3 Temperature	230 - 265	°C
Middle - Zone 2 Temperature	225 - 260	°C
Rear - Zone 1 Temperature	220 - 250	°C
Mold Temperature	60 - 80	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	30 - 80	%
Vent Depth	0.038 - 0.076	mm

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.


Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 www.kedisujiao.com

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

Cycloloy* Resin C6840
Americas: COMMERCIAL

CALCULATED FLOW LENGTH INDICATION
Moldflow® Radial Flow Analysis
Cycloloy® C6840
Melt Temperature : 250°C
Mold Temperature : 70°C

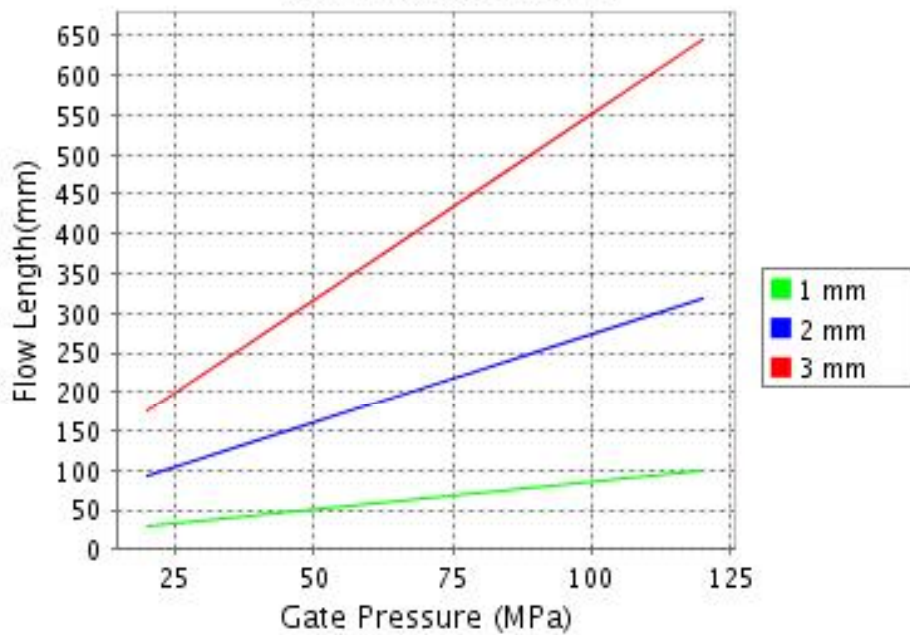

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
4) Own measurement according to UL.
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 www.kedisujiao.com

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！